

BIRCH, STEWART, KOLASCH & BIRCH, LLP

TERRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III
GARY D. YACURA

OF COUNSEL:
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
RUPERT J. BRADY (RET)*
F. PRINCE BUTLER
FRED S. WHISENHUNT

*ADMITTED TO A BAR OTHER THAN VA

INTELLECTUAL PROPERTY LAW
8110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
U S A
(703) 205-8000

FAX: (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: http://www.bskb.com

CALIFORNIA OFFICE:
COSTA MESA, CALIFORNIA

THOMAS S. AUCHTERLONIE
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARK J. NUEL, Ph.D.
D. RICHARD ANDERSON
PAUL C. LEWIS
MARK W. MILSTEAD*
RICHARD J. GALLAGHER
JAYNE M. SAYDAH*

REG. PATENT AGENTS:
FREDERICK R. HANDREN
MARYANNE ARMSTRONG
MAKI HATSUMI
MIKE S. RYU
CRAIG A. McROBBIE
GARTH M. DAHLEN, Ph.D.
LAURA C. LUTZ
ROBERT E. GOOZNER, Ph.D.
HYUNG N. SOHN
MATTHEW J. LATTIG
ALAN PEDERSEN-GILES
C. KEITH MONTGOMERY
TIMOTHY R. WYCKOFF
KRISTI L. RUPERT, Ph.D.
LARRY J. HUME
ALBERT LEE
HRAYR A. SAYADIAN, Ph.D.



Date: October 5, 2000

Docket No.: 2257-0163P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): YUKAWA, Maki

For: DIGITAL BROADCAST RECEIVING SYSTEM

Enclosed are:

- ☒ A specification consisting of 42 pages
- ☒ 17 sheet(s) of Formal drawings
- ☒ An assignment of the invention
- ☒ Certified copy of Priority Document(s)
- ☒ Executed Declaration ☒ Original ☐ Photocopy
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☐ Preliminary Amendment
- ☒ Information Disclosure Statement, PTO-1449 and reference(s)

Other _____

The filing fee has been calculated as shown below:

| LARGE ENTITY | | | | SMALL ENTITY | | | |
|--|-------------------------|-------------------------|-------------------------|--------------|----------|----------------------|----------|
| FOR | NO. FILED | NO. EXTRA | RATE | FEE | | RATE | FEE |
| BASIC FEE | ***** ***** ***** | ***** ***** ***** | ***** ***** ***** | \$710.00 | or | **** **** **** | \$355.00 |
| TOTAL CLAIMS | 15 - 20 = | 0 | x18 = \$ | 0.00 | or | x 9 = \$ | 0.00 |
| INDEPENDENT | 1 - 3 = | 0 | x80 = \$ | 0.00 | or | x 40 = \$ | 0.00 |
| MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u> | | | | +270 = \$ | or | +135 = \$ | 0.00 |
| TOTAL \$ | | | | 710.00 | TOTAL \$ | | |
| | | | | | | | |

☒ A check in the amount of \$ 710.00 to cover the filing fee and recording fee (if applicable) is enclosed.

☐ Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.

☐ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

MICHAEL K. MUTTER

Reg. No. 29,680

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000
MKM/rem

TITLE OF THE INVENTION

Digital Broadcast Receiving System

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to a digital broadcast receiving system, and more particularly, it relates to a program change detecting function thereof.

Description of the Background Art

Fig. 22 is a block diagram showing the structure of a receiver of a conventional digital broadcast receiving system, and Fig. 23 is a block diagram showing the structure of a recording/reproducing apparatus of the conventional digital broadcast receiving system. The conventional digital broadcast receiving system shown in Figs. 22 and 23 is based on a system disclosed in Japanese Patent Application Laid-Open No. 9-247603 (1997). As shown in Figs. 22 and 23, the digital broadcast receiving system includes a receiver 100 and a recording/reproducing apparatus 2, while a monitor 104 is connected to the receiver 100.

As shown in Fig. 22, the receiver 100 has a receiving/demodulating part 111, a packet filter 112, a controller 123, an information table extractor 114, a program selection/acquisition information part 115, a system clock generator 116, a changeover switch 117, a demultiplexer 118, a decoder 119, a digital interface 122, an information table rewriter 124 rewriting an information table obtained from the packet filter 112, a discontinuity information generator 125 detecting that a demodulated signal obtained from the receiving/demodulating part 111 is discontinuous and generating discontinuity information and a recording/reproducing information table generator 126 generating a recording/reproducing information table described later.

25 On the other hand, the recording/reproducing apparatus 2 has a digital interface

131, an information table extractor 132, a system clock generator 133, a deck part 135 and a buffer 136 as shown in Fig. 23, and additionally has a PCR rewriter 137 rewriting a PCR (program clock reference), a discontinuity information rewriter 138 rewriting the discontinuity information, a discontinuity information detector 139 detecting the discontinuity information, a controller 140 and a display 141 displaying its operating state.

When receiving a digital television signal from the digital interface 131, the recording/reproducing apparatus 2 extracts the recording/reproducing information table by the information table extractor 132. The controller 140 extracts a plurality of information related to programs from the extracted recording/reproducing information table.

The system clock generator 133 generates a system clock 27 MHz of the recording/reproducing apparatus 2 with reference to a PCR included in a transport packet of MPEG2. The discontinuity information detector 139 monitors whether or not an information table of the digital television signal includes discontinuity information, for immediately posting the information table extractor 132, the system clock generator 133 and the controller 140 when the information table includes discontinuity information and reloading the PCR, PAT and a PMT (program map table) thereby minimizing failure resulting from clock discontinuity.

The controller 140 sets a recording bit rate of the recording/reproducing apparatus 2 from information in the information table, performs operations such as error correction and modulation by the deck part 35 and records the recording bit rate in a recording medium.

When the information table includes no information related to bit rate extraction and the recording bit rate cannot be set, the controller 140 sets a mode to a

maximum recording bit rate of the recording/reproducing apparatus 2 and records the same. At this time, the controller 140 monitors an occupied quantity of the buffer 136 for posting a user when the rate of a received signal is greater than the recording rate and overflows the buffer 136.

5 In reproduction, the recording/reproducing apparatus 2 demodulates a reproduced signal from the recording medium by the deck part 135, performs an operation such as error correction and outputs the signal to the digital interface 131. When changing an operation mode from general reproduction to high-speed reproduction or performing rewinding or slow reproduction, the PCR rewriter 137 rewrites the PCR to
10 a correct value while the discontinuity information rewriter 138 adds information indicating discontinuity to the recording/reproducing information table.

The conventional digital broadcast receiving system having the aforementioned structure stores information necessary for recording/reproduction in the recording/reproducing information table as to a program for recording a digital television
15 signal. The information necessary for recording/reproduction includes information indicating the bit rate of the program of the recorded digital broadcast signal, the broadcast starting date, the time length of the broadcast, the title of the program, the broadcasting channel and the type of each stream of the digital broadcast signal. Such an information table is multiplexed on the digital television signal in a predetermined
20 table form, thereby simplifying extraction and acquisition of information in subsequent processing.

In the aforementioned conventional digital broadcast receiving system, system construction of the receiver is disadvantageously complicated since a large number of types of information must be rewritten for changing the program. When detecting
25 program change depending on change of a version number of the information table, it is

impossible to cope with such a case that no special order is observed in version numbers of the information table.

SUMMARY OF THE INVENTION

A digital broadcast receiving system according to a first aspect of the present invention has a receiver receiving a digital broadcast signal including an information table describing a program parameter forming a program, while the receiver comprises parameter set means for setting the program parameter described in the information table included in the digital broadcast signal as a signal extraction parameter; and signal extraction means for extracting a program signal from the digital broadcast signal on the basis of the signal extraction parameter, and the parameter set means detects content change of the information table on the basis of a predetermined criterion and sets the program parameter described in the information table after the content change as the signal extraction parameter every detection of the content change.

As described above, the parameter set means of the digital broadcast receiving system according to the first aspect sets the program parameter described in the information table after content change every detection of the content change of the information table, whereby receiving can be quickly performed in program with no hindrance through content change of the information table.

The parameter set means may have a structure capable of detecting content change of the information table, whereby the receiver can be implemented with a relatively simple structure.

According to a second aspect of the present invention, the parameter set means monitors the contents of the information table every predetermined time, while the predetermined criterion includes presence/absence of content change of the information table itself.

The digital broadcast receiving system according to the second aspect can quickly detect program change by detecting content change of the information table itself every predetermined time.

According to a third aspect of the present invention, the information table further describes a PCR (program clock reference) serving as time information, and the parameter set means monitors discontinuity of the PCR while the predetermined criterion includes presence/absence of discontinuity of the PCR.

The digital broadcast receiving system according to the third aspect can detect content change of the information table with a relatively simple criterion on presence/absence of discontinuity of the PCR.

According to a fourth aspect of the present invention, the information table further describes a PCR serving as timing information, and the parameter set means monitors the received state of the PCR while the predetermined criterion includes whether or not the PCR is unreceivable for a predetermined time.

The digital broadcast receiving system according to the fourth aspect can detect content change of the information table by relatively simple recognition on the fact that the PCR is unreceivable for a predetermined time.

According to a fifth aspect of the present invention, the receiver further comprises decoding means decoding the program signal, and the parameter set means monitors a result of decoding by the decoding means while the predetermined criterion includes presence/absence of error occurrence in the result of decoding.

The digital broadcast receiving system according to the fifth aspect can detect content change of the information table with a relatively simple criterion on presence/absence of error occurrence in a decoding result.

According to a sixth aspect of the present invention, the digital broadcast signal

includes an EPG (electric program guide) describing a schedule for a broadcasted program, and the parameter set means previously recognizes an end time of a currently received program from the EPG while the predetermined criterion includes whether or not reaching the end time of the program.

5 The digital broadcast receiving system according to the sixth aspect can detect content change of the information table without regularly monitoring the digital broadcast signal by previously recognizing the end time of the current program from the EPG.

 According to a seventh aspect of the present invention, the digital broadcast signal includes an externally received digital broadcast signal directly received from
10 outside.

 The digital broadcast receiving system according to the seventh aspect can detect content change of the information table without manipulating the externally received digital broadcast signal directly received from outside.

 According to an eighth aspect of the present invention, the digital broadcast
15 receiving system further comprises recording/reproducing means having a recording/reproducing part receiving an externally received digital broadcast signal from outside for recording the externally received digital broadcast signal while outputting the recorded signal as a digital broadcast signal for reproduction, the digital broadcast signal includes the digital broadcast signal for reproduction, the receiver further comprises
20 storage means, and the parameter set means extracts a next program information table serving as an information table for a next program subsequent to a current program currently received by the receiver from the digital broadcast signal for reproduction recorded in the recording/reproducing part, previously preserves a program parameter described in the next program information table as a next program parameter, and reads
25 the next program parameter from the storage means to set the next program parameter as

the signal extraction parameter when the contents of the information table change.

The digital broadcast receiving system according to the eighth aspect can set the signal extraction parameter at a high speed by setting the next program parameter read/obtained from the storage means as the signal extraction parameter.

5 According to a ninth aspect of the present invention, the digital broadcast receiving system further comprises recording/reproducing means having a recording/reproducing part receiving an externally received digital broadcast signal from outside for recording the externally received digital broadcast signal while outputting the recorded signal as a digital broadcast signal for reproduction, the digital broadcast signal
10 includes the digital broadcast signal for reproduction, the recording/reproducing means further comprises a discontinuity flag adding part for adding a discontinuity flag to the externally received digital broadcast signal when the recording/reproducing part stops recording the externally received digital broadcast signal and making the recording/reproducing part record the externally received digital broadcast signal to
15 which the discontinuity flag is added as the digital broadcast signal for reproduction, and the parameter set means monitors the discontinuity flag in the digital broadcast signal for reproduction while the predetermined criterion includes presence/absence of the discontinuity flag.

The digital broadcast receiving system according to the ninth aspect can
20 recognize change of the contents of the information table with relatively simple processing of detecting presence/absence of a discontinuity flag added when the recording/reproducing part stops recording from the digital broadcast signal for reproduction.

According to a tenth aspect of the present invention, the digital broadcast
25 receiving system further comprises recording/reproducing means having a

recording/reproducing part receiving an externally received digital broadcast signal from outside for recording the externally received digital broadcast signal while outputting the recorded signal as a digital broadcast signal for reproduction, the digital broadcast signal includes the digital broadcast signal for reproduction, the recording/reproducing means further comprises a discontinuity flag adding part adding a discontinuity flag to the digital broadcast signal for reproduction when the recording/reproducing part shifts from a reproducing state for the digital broadcast signal for reproduction to a stop state, and the parameter set means monitors the discontinuity flag in the digital broadcast signal for reproduction while the predetermined criterion includes presence/absence of the discontinuity flag.

The digital broadcast receiving system according to the tenth aspect can recognize change of the contents of the information table with relatively simple processing of detecting presence/absence of a discontinuity flag added when the recording/reproducing part shifts from a reproducing state to a stop state from the digital broadcast signal for reproduction.

According to an eleventh aspect of the present invention, the digital broadcast receiving system further comprises recording/reproducing means having a recording/reproducing part receiving an externally received digital broadcast signal from outside for recording the externally received digital broadcast signal while outputting the recorded signal as a digital broadcast signal for reproduction, the digital broadcast signal includes the digital broadcast signal for reproduction, the recording/reproducing means further comprises identification code adding means for adding an identification code identifiable in a program unit to an information table in the externally received digital broadcast signal when the recording/reproducing part records the externally received digital signal and making the recording/reproducing part record the externally received

digital broadcast signal to which the identification code is added as the digital broadcast signal for reproduction, and the parameter set means monitors the identification code added to the information table in the digital broadcast signal for reproduction while the predetermined criterion includes presence/absence of change of the identification code.

5 The digital broadcast receiving system according to the eleventh aspect can recognize change of the contents of the information table with relatively simple processing of detecting change of an identification code identifiable in a program unit added to the information table.

10 According to a twelfth aspect of the present invention, the digital broadcast receiving system further comprises recording/reproducing means having a recording/reproducing part receiving an externally received digital broadcast signal from outside for recording the externally received digital broadcast signal while outputting the recorded signal as a digital broadcast signal for reproduction, the digital broadcast signal includes the digital broadcast signal for reproduction, the recording/reproducing means
15 further comprises identification code adding means adding a new identification code to an information table in the digital broadcast signal for reproduction every time the recording/reproducing part shifts from a reproducing state for the digital broadcast signal for reproduction to a stop state, and the parameter set means monitors the identification code added to the information table in the digital broadcast signal for reproduction while
20 the predetermined criterion includes presence/absence of change of the identification code.

 The digital broadcast receiving system according to the twelfth aspect can recognize change of the contents of the information table with relatively simple processing of detecting change of an identification code of the information table changed
25 when the recording/reproducing part shifts from a reproducing state to a stop state.

According to a thirteenth aspect of the present invention, the information table includes a current program information table corresponding to a currently broadcasted program and a next program information table corresponding to a program broadcasted next, and wherein the parameter set means previously performs temporary set processing extracting the next program information table from the digital broadcast signal and temporarily setting a program parameter described in the next program information table as a next program parameter, monitors the contents of the current program information table while the predetermined criterion includes whether or not the contents of the current program information table change to the contents of the next program information table, and performs real set processing setting the temporarily set next program parameter as the signal extraction parameter when the contents of the information table change.

The digital broadcast receiving system according to the thirteenth aspect, performing real set processing for setting a previously temporarily set next program parameter as a current signal extraction parameter when the contents of the information table change, can set the signal extraction parameter at a high speed.

According to a fourteenth aspect of the present invention, the receiver includes storage means, the temporary set processing includes processing of making the storage means store the next program parameter, and the real set processing includes processing of reading the next program parameter from the storage means and setting the next program parameter as a signal extraction parameter.

The digital broadcast receiving system according to the fourteenth aspect sets the signal extraction parameter at a high speed by executing processing of reading the next program parameter from the storage means and setting the same to the signal extraction parameter as real set processing.

According to a fifteenth aspect of the present invention, the signal extraction

means extracts a program signal from the digital broadcast signal on the basis of a valid signal extraction parameter, the temporary setting includes processing of temporarily setting the next program parameter without validating the same as the signal extraction parameter, and the real set processing includes processing of validating the signal extraction parameter.

The digital broadcast receiving system according to the fifteenth aspect sets the signal extraction parameter at a high speed by executing processing of validating the signal extraction parameter as real set processing.

An object of the present invention is to obtain a digital broadcast receiving system capable of executing receiving in program change with no hindrance through a receiver having a relatively simple structure.

The foregoing and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the internal structure of a digital broadcast receiving system according to an embodiment 1 of the present invention;

Fig. 2 is a flow chart showing a program change detecting operation in the digital broadcast receiving system according to the embodiment 1 of the present invention;

Fig. 3 is an explanatory diagram for illustrating the principle of an embodiment 2 of the present invention;

Fig. 4 is a flow chart showing PCR interruption processing in a digital broadcast receiving system according to the embodiment 2;

Fig. 5 is a flow chart showing a program change detecting operation in a digital

broadcast receiving system according to an embodiment 3 of the present invention;

Fig. 6 is a flow chart showing a program change detecting operation in a digital broadcast receiving system according to an embodiment 4 of the present invention;

Fig. 7 is an explanatory diagram showing a program change detection principle according to an embodiment 5 of the present invention;

Fig. 8 is a flow chart showing a program change detecting operation in a digital broadcast receiving system according to the embodiment 5 of the present invention;

Fig. 9 is a block diagram showing the structure of a digital broadcast receiving system according to an embodiment 6 of the present invention;

Fig. 10 is a block diagram showing the internal structure of the digital broadcast receiving system according to the embodiment 6 of the present invention;

Fig. 11 is a flow chart showing a parameter set processing operation after program change in the digital broadcast receiving system according to the embodiment 6 of the present invention;

Fig. 12 is an explanatory diagram for illustrating a discontinuity flag adding operation in a digital broadcast receiving system according to an embodiment 7 of the present invention;

Fig. 13 is a flow chart showing a program change detecting operation in the digital broadcast receiving system according to the embodiment 7 of the present invention;

Fig. 14 is an explanatory diagram for illustrating a discontinuity flag adding operation in a digital broadcast receiving system according to an embodiment 8 of the present invention;

Fig. 15 is an explanatory diagram for illustrating a version number rewriting operation in a digital broadcast receiving system according to an embodiment 9 of the

present invention;

Fig. 16 is a flow chart showing a program change detecting operation in the digital broadcast receiving system according to the embodiment 9 of the present invention;

Fig. 17 is an explanatory diagram for illustrating a version number rewriting operation in a digital broadcast receiving system according to an embodiment 10 of the present invention;

Fig. 18 is a flow chart showing an initial operation of a first program change detecting operation in a digital broadcast receiving system according to an embodiment 11 of the present invention;

Fig. 19 is a flow chart showing an interruption processing operation in the first program change detecting operation in the digital broadcast receiving system according to the embodiment 11 of the present invention;

Fig. 20 is a flow chart showing an initial operation of a second program change detecting operation in the digital broadcast receiving system according to the embodiment 11 of the present invention;

Fig. 21 is a flow chart showing an interruption processing operation in the second program change detecting operation in the digital broadcast receiving system according to the embodiment 11 of the present invention;

Fig. 22 is a block diagram showing the structure of a receiver of a conventional digital broadcast receiving system; and

Fig. 23 is a block diagram showing the structure of a recording/reproducing apparatus of the conventional digital broadcast receiving system.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

<Embodiment 1>

Fig. 1 is a block diagram showing the internal structure of a digital broadcast receiving system according to an embodiment 1 of the present invention. As shown in Fig. 1, the digital broadcast receiving system is formed by a receiver 1 and a monitor 4. Fig. 1 shows parts transferring data with arrows, while omitting transfer of control signals such as an interruption signal.

A transport stream TS1 formed by a digital broadcast signal is input in a receiving/demodulating part 11 in the receiver 1. The transport stream TS1 may conceivably be a signal (externally received digital broadcast signal) directly received from outside or a reproduced signal (digital broadcast signal for reproduction) received from a home server described later.

The receiving/demodulating part 11 demodulates the received transport stream TS1 and outputs a packet stream. The packet stream includes a packet (hereinafter referred to also as "data transmission packet") for transmitting image data, sound data etc. of a program and a packet (hereinafter referred to also as "information table transmission packet") for transmitting an information table describing a program parameter forming the program. The term "information table" described in this specification mainly indicates a PMT (program map table).

When a user specifies a specific program, a controller 13 serves as parameter set means for setting the program parameter described in the information table in a DEMUX (demultiplexer) 12 as a signal extraction parameter thereby instructing packet selection contents to the DEMUX 12. The program parameter is data including a PID (packet identifier) for dismantling a packet form and obtaining image data, sound data, a PCR and the like.

On the basis of the signal extraction parameter, the DEMUX 12 dismantles the packet form in the packet stream for extracting a bit stream of the image data and

outputting the same to an image decoder 14 while extracting a bit stream of the sound data and outputting the same to a sound decoder 15 and extracting a bit stream of the PCR and outputting the same to a system clock generator 16. These bit streams of the image data, the sound data and the PCR correspond to program signals.

5 The image decoder 14 and the sound decoder 15 decode the bit streams from the DEMUX 12 and output the same to the monitor 4. The monitor 4 displays the image and the sound on the basis of the output signals from the image decoder 14 and the sound decoder 15 respectively.

10 The system clock generator 16 refers to a clock restoration reference signal, referred to as a PCR, obtained from the DEMUX 12 and generates a system clock of the receiver 1.

Fig. 2 is a flow chart showing a program change detecting operation in the digital broadcast receiving system according to the embodiment 1 of the present invention. This operation is performed mainly on the DEMUX 12 under control of the
15 controller 13.

Referring to Fig. 2, a second is counted with the system clock obtained from the system clock generator 16 at a step S11, and the information table is read from the information table transmission packet of the packet stream demodulated every second at a step S12. Thus, it is possible to detect content change of the information table, i.e.,
20 program change timing with precision within one second by reading the information table from the packet stream every second.

Then, content change of the information table is checked at a step S13. The content change is checked by checking a CRC (cyclic redundancy check) value or checking content change of at least one of values of PIDs (packet identifiers) of the
25 image, the sound and the PCR (program clock reference), stream types and descriptors,

information necessary for operations of the receiver 1. Such a checking function can be implemented with a relatively simple structure.

When change of the contents of the information table is detected in the aforementioned checking (YES at the step S13), a determination is made on detection of program change at a step S14, and the program parameter described in the information table is set as a signal extraction parameter of the DEMUX 12 at a step S15.

Channel changing validating the signal extraction parameter set in the DEMUX 12 is executed at a step S16, and thereafter the process returns to the step S11.

When the information table remains unchanged (NO at the step S13), the process immediately returns to the step S11 without carrying out the steps S14 to S16. Thereafter the processing through the steps S11 to S16 is repeated thereby quickly performing the program change detecting operation.

Thus, the digital broadcast receiving system according to the embodiment 1 employs the receiver 1 of a relatively simple structure as shown in Fig. 1 for quickly setting the signal extraction parameter of the DEMUX 12 in program change, thereby performing a receiving operation with no hindrance.

<Embodiment 2>

A digital broadcast receiving system according to an embodiment 2 of the present invention utilizes discontinuity of the value of a PCR for detecting program change. The PCR is time information, and hence a determination on program change is made when the value of the PCR deviates from the value of an STC (system time clock: reference synchronous signal) for newly rereading an information table.

Fig. 3 is an explanatory diagram for illustrating the principle of the embodiment 2 of the present invention. As shown in Fig. 3, an STC time t21 in first PCR receiving interruption and a PCR instruction time t11 are set to reference times for

an STC and a PCR respectively. For example, the STC time t_{21} is set to the PCR instruction time t_{11} in first PCR receiving interruption.

The time difference ΔT_s between an STC time t_{22} in second PCR receiving interruption and the STC time t_{21} is compared with the time difference ΔT_p between a PCR instruction time t_{12} and the PCR instruction time t_{11} .

When the absolute value of the deviation between the time differences ΔT_s and ΔT_p is not more than 0.1 sec., the PCR can be regarded as continuous. When the absolute value of the deviation between the time differences ΔT_s and ΔT_p is in excess of 0.1 sec., however, the PCR is regarded as discontinuous for determining that the contents of the information table have changed for changing the program. When detecting program change with the relatively simple criterion of discontinuity of the PCR, the next program can be received with no hindrance and normally reproduced on a monitor 4 by newly reading the information table and setting a program parameter described in the information table in a demultiplexer.

Fig. 4 is a flow chart showing PCR interruption processing in the digital broadcast receiving system according to the embodiment 2. This operation is performed mainly on a DEMUX 12 under control of a controller 13, similarly to the embodiment 1. The system structure of the embodiment 2 is similar to that of the embodiment 1.

When PCR receiving interruption arrives, time differences between PCRs and STCs are compared with each other for calculating deviation between the time differences at a step S21, as shown in Fig. 3. The processing is ended when the deviation between the time differences is within 0.1 sec. (NO at the step S21), while the process advances to a step S22 if the deviation is in excess of 1 sec. (YES at the step S21). The determination at the step S21 can be relatively simply made.

Detection of program change is determined at the step S22, a new information

table is read at a step S23, a program parameter described in the read information table is set as a signal extraction parameter of the DEMUX 12 at a step S24, and channel changing is performed at a step S25 for ending the interruption processing.

Thus, the digital broadcast receiving system according to the embodiment 2 can perform a receiving operation in program change with no hindrance through a receiver of a relatively simple structure, similarly to the embodiment 1.

<Embodiment 3>

An embodiment 3 of the present invention detects program change by non-arrival of a PCR over a constant time. When the PCR does not arrive due to change of its PID, no PCR interruption takes place and hence program change cannot be detected by the aforementioned comparison with an STC value. Therefore, a counter value for counting a continuation time of non-arrival of the PCR is added for setting a counter to "0" when PCR interruption takes place. A determination on program change is made when the counter value is more than or equal to a predetermined value, for rereading an information table. It is possible to relatively readily recognize that the continuation of non-arrival of the PCR exceeds a predetermined time.

Fig. 5 is a flow chart showing a program change detecting operation based on PCR arrival check processing by a digital broadcast receiving system according to the embodiment 3 of the present invention. This operation is performed mainly on a DEMUX 12 under control of a controller 13, similarly to the embodiment 1. The system structure of the embodiment 3 is similar to that of the embodiment 1.

The PCR arrival check processing is executed every second on the basis of a system clock generated in a system clock generator 16. In the PCR arrival check processing, a counter for counting a PCR non-arrival continuation time is set. The counter can be implemented by a function previously provided on the controller 13.

Referring to Fig. 5, whether or not the value of the aforementioned counter is at least "3" (predetermined value) is checked at a step S31 for advancing to a step S32 if the counter value is at least 3 (YES) while counting up the counter at a step S33 for ending the processing if the value is less than 3 (NO).

5 The counter is cleared at the step S32. At this time, it follows that PCR receiving interruption does not occur for at least 3 seconds (since the counter is reset to "0" upon occurrence of PCR receiving interruption), for determining that the program is changed at a step S34 since the PCR does not flow in the current PID, rereading an information table at a subsequent step S35, setting a program parameter described in the
10 reread information table as a signal extraction parameter of the DEMUX 12 at a step S36 and executing channel changing at a step S37 so that the changed program can be reproduced on a monitor 4 with no hindrance.

Thus, the digital broadcast receiving system according to the embodiment 3 can perform a receiving operation in program change with no hindrance through a receiver of
15 a relatively simple structure similarly to the embodiment 1.

<Embodiment 4>

An embodiment 4 of the present invention regards that a program changes when a decoder chip (an image decoder 14 or a sound decoder 15) causes an error such as an image format error, a bit rate change error, a buffer overflow, a buffer underflow or
20 image freezing while the image decoder 14 and the sound decoder 15 normally perform decoding.

Fig. 6 is a flow chart showing a program change detecting operation based on error notification of a decoding result of a decoder monitored by a digital broadcast receiving system according to an embodiment 4 of the present invention. This operation
25 is mainly performed on a DEMUX 12 under control of a controller 13, similarly to the

embodiment 1. The system structure of the embodiment 4 is similar to that of the embodiment 1 except that the controller 13 is capable of recognizing error notification from the image decoder 14 or the sound decoder 15.

Such a structure that the controller 13 can recognize error notification from the image decoder 14 or the sound decoder 15 can be relatively readily implemented by the controller 13 by periodically monitoring status information indicating presence/absence of error notification from the image decoder 14 or the sound decoder 14, issuing interruption upon error notification or the like.

When receiving error notification from either decoder 14 or 15, the controller 13 determines that program change has been made, rereads an information table at a step S41, sets a program parameter described in the reread information table as a signal extraction parameter of the DEMUX 12 at a step S42 and executes channel changing at a step S43, so that the changed program can be reproduced on a monitor 4 with no hindrance.

Thus, the digital broadcast receiving system according to the embodiment 4 can perform receiving in program change with no hindrance through a receiver of a relatively simple structure, similarly to the embodiment 1.

<Embodiment 5>

An embodiment 5 of the present invention is based on previous recognition of an end time of a current program from an EPG (electronic program guide).

Fig. 7 is an explanatory diagram showing a program change detection principle of the embodiment 5. When programs A, B and C are changed in this order as shown in Fig. 7, a program change point Pa for changing the program A to the program B and a program change point Pb for changing the program B to the program C are previously recognized from the EPG.

Program change timing can be recognized by comparing a current reproduction point P1 with the program change point Pa or the program change point Pb. This comparison can be relatively readily implemented.

Fig. 8 is a flow chart showing a program change detecting operation according to a digital broadcast receiving system according to the embodiment 5 of the present invention. This operation is performed mainly on a DEMUX 12 under control of a controller 13, similarly to the embodiment 1. The system structure of the embodiment 5 is similar to that of the embodiment 1.

At a step S51, an end time of a currently reproduced program is previously acquired from the EPG at a step S51. The difference time between the current time and the program end time acquired at the step S51 is measured at a step S52, for initializing a count value of a difference time counter with the aforementioned difference time. Thereafter the count value of the difference time counter is counted down at predetermined time intervals.

The step S53 is repeated until the count value of the difference time counter reaches zero, so that the process first shifts to a step S54 when the count value reaches zero at the step S53.

The changed program can be reproduced on a monitor 4 with no hindrance by rereading an information table at a step S54, setting a program parameter of the reread information table as a signal extraction parameter of the DEMUX 12 at a step S55 and executing channel changing at a step S56.

Thus, the digital broadcast receiving system according to the embodiment 5 can perform receiving in program change with no hindrance through a receiver of a relatively simple structure, similarly to the embodiment 1.

<Embodiment 6>

Fig. 9 is a block diagram showing the structure of a digital broadcast receiving system according to an embodiment 6 of the present invention. As shown in Fig. 9, an externally received transport stream TS0 (externally received digital broadcast signal) is stored and manipulated in a home server 3 serving as a recording/reproducing part, and thereafter supplied to a receiver 1 as a reproduced transport stream TS1 (digital broadcast signal for reproduction).

While the receiver 1 of each of the digital broadcast receiving systems according to the embodiments 1 to 5 may directly receive a transport stream from outside without manipulating the same or may receive a reproduced transport stream from a home server, embodiments 6 to 10 of the present invention presuppose the structure that the receiver 1 receives the transport stream TS1 reproduced from the home server, as shown in Fig. 9. The home server, an element corresponding to the conventional recording/reproducing apparatus 2 shown in Fig. 23, is described as a home server specializing a data preservation function deeply related to the characteristic part of the present invention.

Fig. 10 is a block diagram showing the structure of the digital broadcast receiving system according to the embodiment 6. As shown in Fig. 10, a next program memory 17 allowing a controller 13 to read/write information is provided. The remaining structure of this embodiment is similar to that of the embodiment 1 shown in Fig. 1, and hence redundant description is omitted.

The digital broadcast receiving system according to the embodiment 6 previously reads an information table of a next program subsequent to a currently reproduced program from the transport stream TS1 stored in the home server 30 and previously stores a next program parameter described in the information table of the next program in the next program memory 17. In this case, the transport stream TS1 may

simply include the information table of the next program, and it is conceivable to read the transport stream TS1 on the beginning part of the next program, for example.

The digital broadcast receiving system according to the embodiment 6 previously recognizes an end point of the program from an EPG and rereads the next program parameter from the next program memory 17 when reaching a program change time similarly to the embodiment 5, for setting this parameter as a signal extraction parameter of a demultiplexer and decoding the stream.

The next program parameter is previously written in the next program memory 17, whereby the system according to the embodiment 6 may not monitor the information table. The signal extraction parameter of the demultiplexer may be set only when reaching the program change time, whereby a load on the system can be reduced.

Fig. 11 is a flow chart showing a parameter set processing operation after program change by the digital broadcast receiving system according to the embodiment 6 of the present invention. This operation is performed mainly on a DEMUX 12 under control of the controller 13, similarly to the embodiment 1. Program change detection is performed similarly to the processing according to the embodiment 5 shown in the steps S51 to S53 of Fig. 8.

The parameter set processing is started when detecting a program end time through processing similar to that at the steps S51 to S53 of Fig. 8.

The next program parameter corresponding to the changed program previously stored in the next program memory 17 is read from the next program memory 17 at a step S81, and the read next program parameter is set as a signal extraction parameter of the DEMUX 12 at a step S82.

Channel changing is executed at a step S83 for making an image decoder 14 or a sound decoder 15 start decoding a next program. Whether or not it is normally

decodable is checked at a step S84.

The processing is ended when normally decodable (YES at the step S84). When not normally decodable (NO at the step S84), an information table is read from a packet stream based on the transport stream TS1 currently flowing from the home server 3 at a step S85, a program parameter described in the read information table is set as the signal extraction parameter of the DEMUX 12 at a step S86, channel changing is executed at a step S87 and thereafter the processing is ended.

The controller 13 detects error notification from the image decoder 14 or the sound decoder 15 as described with reference to the embodiment 4, for determining whether or not it is normally decodable at the step S84.

Thus, the digital broadcast receiving system according to the embodiment 6 can perform receiving in program change with no hindrance through a receiver of a relatively simple structure.

<Embodiment 7>

A digital broadcast receiving system according to an embodiment 7 of the present invention adds a discontinuity flag (corresponding to the discontinuity information of the prior art) to transport stream data when stopping recording a program and rewrites a CRC value of a transport stream header with reflection of change caused by setting the discontinuity flag thereby detecting program change with a criterion of presence/absence of the discontinuity flag, for newly reading an information table from a transport stream subsequently input in a receiver.

Fig. 12 is an explanatory diagram for illustrating a discontinuity flag adding operation by the digital broadcast receiving system according to the embodiment 7. As shown in Fig. 12, the home server 3 recording a transport stream TS0 adds a discontinuity flag by a discontinuity flag adding part 21 when stopping recording the

transport stream TS0 and records the transport stream TS0 having the added discontinuity flag as a transport stream TS1.

Therefore, it follows that a receiver 1 receives the transport stream TS1 to which the discontinuity flag is added when the home server 3 stops recording, and hence discontinuity interruption based on discontinuity flag detection takes place in the receiver 1 at the turn of the program. Program change can be detected by this interruption. The discontinuity interruption can be readily caused by setting a DEMUX 12 to cause interruption when detecting the discontinuity flag. The discontinuity flag can be relatively readily detected from the transport stream TS1.

Fig. 13 is a flow chart showing a program change detecting operation by the digital broadcast receiving system according to the embodiment 7 of the present invention. This operation is performed mainly on the DEMUX 12 under control of a controller 13, similarly to the embodiment 1. The system structure of the embodiment 7 is similar to that of the embodiment 1 (provided with the home server 3) except the presence of the discontinuity flag adding part 21.

As shown in Fig. 13, the program change detecting operation according to the embodiment 7 starts when receiving interruption. First, whether or not this is discontinuity (flag) interruption is checked at a step S61 for ending the processing as such when this is not discontinuity interruption (NO at the step S61). The controller 13 can readily determine whether or not this is discontinuity interruption from the contents of a register indicating the interruption contents.

When this is discontinuity interruption (YES at the step S61), on the other hand, it is regarded that program change is detected at a step S62, an information table is read at a step S63, a program parameter described in the read information table is set as a signal extraction parameter of the DEMUX 12 at a step S64 and channel changing is executed at

a step S65, so that the changed program can be reproduced on a monitor 4 with no hindrance.

<Embodiment 8>

A digital broadcast receiving system according to an embodiment 8 of the present invention determines whether or not a home server 3 is in a reproducing state, not to rewrite a table until the state changes if the home server 3 is in a reproducing state while rewriting the table to set a discontinuity flag on a transport stream when the home server 3 changes from a reproducing state to a stop state. At this time, original data on the home server 3 is not rewritten. A receiver 1 can instantaneously detect that reproduction is stopped by discontinuity (flag) interruption, and can prepare for newly acquiring an information table of a subsequently input stream.

Fig. 14 is an explanatory diagram for illustrating a discontinuity flag adding operation by the digital broadcast receiving system according to the embodiment 8. As shown in Fig. 3, the home server 3 outputting a transport stream TS1 in reproduction adds a discontinuity flag by a discontinuity flag adding part 23 when stopping reproduction of the transport stream TS1 and supplies the transport stream TS1 having the added discontinuity flag to the receiver 1 as a transport stream TS2.

Therefore, it follows that the receiver 1 receives the transport stream TS2 to which the discontinuity flag is added when the home server 3 stops reproduction, and hence discontinuity interruption based on discontinuity flag detection takes place in the receiver 1 at the turn of a program. Program change can be detected through this interruption.

While the system according to the embodiment 8 rewrites the table to set the discontinuity flag on the transport stream by the discontinuity flag adding part 23 when the home server 3 changes from the reproducing state to the stop state, detection of

program change in continuous reproduction can also be enabled by rewriting the transport stream to set a discontinuity flag also in ending of a single program during reproduction.

The digital broadcast receiving system according to the embodiment 8 performs a program change detecting operation similarly to the embodiment 7 shown in Fig. 13, and hence redundant description is omitted. The system structure of the digital broadcast receiving system according to the embodiment 8 is similar to that of the embodiment 1 (provided with the home server 3) except that the transport stream TS1 is changed to the transport stream TS2 and the presence of the discontinuity flag adding part 21.

<Embodiment 9>

A digital broadcast receiving system according to an embodiment 9 of the present invention re-affixes a version number (identification code) of an information table when a home server 3 is in a recording state so that program change can be quickly performed with detection by version-up interruption in a system performing reproduction in recorded order. Data on the home server 3 is previously rewritten, a processing time can be reduced in reproduction while a controller 13 may execute program change when receiving the version-up interruption, whereby system resources are not consumed.

Fig. 15 is an explanatory diagram for illustrating a version number rewriting operation in the digital broadcast receiving system according to the embodiment 9.

As shown in Fig. 15, the home server 3 recording a transport stream TS0 rewrites a version number and a CRC value of an information table by a version number rewriting part 22 after recording the transport stream TS0. The version number is set with regularity to increment one by one along order of program reproduction. The home server 3 can identify an interval between programs as an end point of file reproduction. The home server 3 preserves the transport stream TS0 in which the

version number and the CRC value of the information table are rewritten as a transport stream TS1.

Therefore, it follows that a receiver 1 receives the transport stream TS1 multiplexed with the information table in which the version number is updated at the turn of the program. When causing version-up interruption based on detection of version number change of the information table on the receiver 1 at the turn of the program, program change can be detected by this version-up interruption. In other words, change of the version number of the information table can be relatively readily detected from the transport stream TS1.

Fig. 16 is a flow chart showing a program change detecting operation by the digital broadcast receiving system according to the embodiment 9 of the present invention. This operation is performed mainly on a DEMUX 12 under control of a controller 13, similarly to the embodiment 1. The system structure of the embodiment 9 is similar to that of the embodiment 1 (provided with the home server 3) except the presence of the version number rewriting part 22.

As shown in Fig. 16, the embodiment 9 starts the program change detecting operation when receiving interruption. First, whether or not this is version-up interruption is checked at a step S71 for ending the processing as such when this is not version-up interruption (NO at the step S71). The controller 13 can readily determine whether or not this is version-up interruption from the contents of a register indicating the interruption contents.

When this is version-up interruption (YES at the step S71), it is regarded that program change is detected at a step S72, the newest information table is read at a step S73, a program parameter described in the read information table is set as a signal extraction parameter of the DEMUX 12 at a step S74 and channel changing is executed at

a step S75, so that a changed program can be reproduced on a monitor 4 with no hindrance.

Thereafter a version number for causing version-up interruption is set at the DEMUX 12 thereby setting version-up interruption and ending the processing. Due to this version-up interruption setting, the DEMUX 12 can cause version-up interruption when recognizing the set version number.

The embodiment 9 detects program change by causing version-up interruption, whereby no checking other than the processing for checking whether or not this is version-up interruption is required and hence the procedure can be simplified.

<Embodiment 10>

A digital broadcast receiving system according to an embodiment 10 of the present invention increments a version number of an information table one by one on an output stage of a transport stream when reproduction of the transport stream is interrupted. When the stream is reproduced next, the version number of the information table is incremented by 1 and hence a program parameter of a new information table can be set as a signal extraction parameter of a DEMUX 12 by performing processing with version-up interruption similarly to the embodiment 9, whereby program change can be quickly performed.

Fig. 17 is an explanatory diagram for illustrating a version number rewriting operation in the digital broadcast receiving system according to the embodiment 10.

As shown in Fig. 17, a home server 3 reproducing a transport stream TS1 rewrites a version number and a CRC value of an information table by a version number rewriting part 24 when interrupting reproduction for shifting from a reproducing state for the transport stream TS0 to a stop state. The version number is set to increment one by one in order of program reproduction. The home server 3 outputs the transport stream

TS1 in which the version number and the CRC value of the information table are rewritten to a receiver 1 as a transport stream TS2.

Therefore, it follows that the receiver 1 receives the transport stream TS2 multiplexed with the information table in which the version number is updated at the turn of a program. When causing version-up interruption based on detection of version number change of the information table on the receiver 1 at the turn of the program, program change can be detected due to this version-up interruption.

Also when reproducing programs of the home server 3 with no special order, the version number rewriting part 24 rewrites the version number to sequentially increment, whereby the receiver 1 can perform a receiving operation including decoding with no hindrance.

The embodiment 10 performs a program change detecting operation similarly to the flow chart of the embodiment 9 shown in Fig. 16. The system structure of the embodiment 10 is similar to that of the embodiment 1 (provided with the home server 3) except the presence of the version number rewriting part 24.

<Embodiment 11>

A digital broadcast receiving system according to an embodiment 11 of the present invention presupposes that a home server uses and adds current and next flags to an information table or the like so that a current information table corresponding to a current program and a next information table corresponding to a next program are multiplexed on a transport stream TS1 obtained from the home server. In this case, the transport stream TS1 may be directly obtained in a receiver 1 from outside or may be reproduced from the home server.

In the digital broadcast receiving system according to the embodiment 1, the receiver 1 previously reads the next information table so that a program can be

instantaneously changed when a current information table having the same contents as read arrives. In this method, program change is more quickly performed not by reading an information table for a next program after arrival of a transport stream of the next program but by previously recognizing a program parameter of the information table for the next program.

Figs. 18 and 19 are flow charts showing a first program change detecting operation by the digital broadcast receiving system according to the embodiment 11 of the present invention. This operation is performed mainly on a DEMUX 12 under control of a controller 13, similarly to the embodiment 1. The system structure of the embodiment 11 is similar to that of the embodiment 1 except that the receiver 1 stores a next information table memory (memory capable of reading/writing information from/in the controller 13 similarly to the next program memory 17 shown in Fig. 19).

Initialization is now described with reference to Fig. 18. First, the current information table is read at a step S91, a program parameter described in the read information table is set as a signal extraction parameter of the DEMUX 12 at a step S92, and channel changing is executed at a step S93.

The next information table is read at a step S94, and a program parameter described in the next information table at the step S94 is preserved in the next information table memory as a next program parameter at a step S95. The next program parameter is temporarily set at the step S95.

Thereafter the DEMUX 12 is so set as to cause interruption (information table interruption) when the contents of the current information table are changed to those of the next information table at a step S96.

When the initialization is ended, an interruption operation shown in Fig. 19 is enabled. In other words, the operation shown in Fig. 19 is started when receiving

interruption.

First, whether or not it is information table interruption is checked at a step S101 for ending the processing when this is not information table interruption (NO at the step S101) while shifting to a step S102 when it is information table interruption (YES at the step S101).

Program change is detected at the step S102, and a next program parameter is read from the next information table memory at a step S103. The next program parameter is set as a signal extraction parameter of the DEMUX 12 at a step S104, and channel changing is executed at a step S105. The next program parameter is really set through the steps S103 to S105.

The memory read operation at the step S103 is performed at a speed considerably higher than that for the information table read operation from the transport stream TS1, whereby efficiency of program change can be improved.

The next information table is read at a step S106, and a program parameter described in the read next information table is preserved in the next information table as a new next program parameter at a step S106.

The DEMUX 12 is so set as to cause information table interruption when the contents of the current information table change to those of a new next information table at a step S108, for ending the processing.

Figs. 20 and 21 are flow charts showing a second program change detecting operation by the digital broadcast receiving system according to the embodiment 11 of the present invention. The system structure of this embodiment is similar to that of the embodiment 1.

Initialization is now described with reference to Fig. 20. First, the current information table is read at a step S111, a program parameter described in the read

current information table is set as a signal extraction parameter of the DEMUX 12 at a step S112, and channel changing is executed at a step S113.

The next information table is read at a step S114, and a program parameter described in the read next information table is set as a signal extraction parameter at a step S115.

The DEMUX 12 is so set as to cause interruption (information table interruption) when the contents of the current information table are changed to those of the next information table at a step S118.

When the initialization is ended, an interruption operation shown in Fig. 21 is enabled. In other words, the operation shown in Fig. 21 is started when receiving interruption. No channel changing is executed after the step S115 in the initialization, and hence the signal extraction parameter set at the step S115 is not validated but the signal extraction parameter set at the step S112 is still valid. In other words, the processing at the step S115 is temporary setting of the signal extraction parameter.

Referring to Fig. 21, whether or not it is information table interruption is checked at a step S121, for ending the processing if this is not information table interruption (NO at the step S121) while shifting to a step S122 if this is information table interruption (YES at the step S121).

Program change is detected at a step S122, and channel changing is executed at a step S123. The signal extraction parameter set at the step S115 in the initialization shown in Fig. 20 is first validated at this point of time. In other words, the signal extraction parameter is really set at the step S123.

The next information table is read at a step S124, and a program parameter described in the next information table is set as a signal extraction parameter at a step S125. The DEMUX 12 is so set as to cause information table interruption when the

contents of the current information table are changed to those of a next information table at a step S126, for ending the processing.

In the second program change detecting operation, program change is ended by simply executing channel changing, whereby the efficiency of program change can be remarkably improved also as compared with the first program change detecting operation.

While the invention has been shown and described in detail, the foregoing description is in all aspects illustrative and not restrictive. It is therefore understood that numerous modifications and variations can be devised without departing from the scope of the invention.

WHAT IS CLAIMED IS:

1. A digital broadcast receiving system having a receiver receiving a digital
5 broadcast signal including an information table describing a program parameter forming
a program,

said receiver comprising:

parameter set means for setting said program parameter described in said
information table included in said digital broadcast signal as a signal extraction
10 parameter; and

signal extraction means for extracting a program signal from said digital
broadcast signal on the basis of said signal extraction parameter,

said parameter set means detecting content change of said information table on
the basis of a predetermined criterion and setting said program parameter described in
15 said information table after said content change as said signal extraction parameter every
detection of said content change.

2. The digital broadcast receiving system according to claim 1, wherein

said parameter set means monitors the contents of said information table every
20 predetermined time, while said predetermined criterion includes presence/absence of
content change of said information table itself.

3. The digital broadcast receiving system according to claim 1, wherein

said information table further describes a PCR (program clock reference)
25 serving as time information, and

said parameter set means monitors discontinuity of said PCR, while said predetermined criterion includes presence/absence of discontinuity of said PCR.

4. The digital broadcast receiving system according to claim 1, wherein

said information table further describes a PCR serving as timing information, and

said parameter set means monitors the received state of said PCR, while said predetermined criterion includes whether or not said PCR is unreceivable for a predetermined time.

5. The digital broadcast receiving system according to claim 1, wherein

said receiver further comprises:

decoding means decoding said program signal, and

said parameter set means monitors a result of decoding by said decoding means,

while said predetermined criterion includes presence/absence of error occurrence in said result of decoding.

6. The digital broadcast receiving system according to claim 1, wherein

said digital broadcast signal includes an EPG (electric program guide)

describing a schedule for a broadcasted program, and

said parameter set means previously recognizes an end time of a currently received program from said EPG, while said predetermined criterion includes whether or not reaching said end time of said program.

7. The digital broadcast system according to claim 1, wherein

said digital broadcast signal includes an externally received digital broadcast signal directly received from outside.

8. The digital broadcast receiving system according to claim 6, further comprising:

recording/reproducing means having a recording/reproducing part receiving an externally received digital broadcast signal from outside for recording said externally received digital broadcast signal while outputting recorded said signal as a digital broadcast signal for reproduction, wherein

said digital broadcast signal includes said digital broadcast signal for reproduction,

said receiver further comprises storage means, and

said parameter set means extracts a next program information table serving as an information table for a next program subsequent to a current program currently received by said receiver from said digital broadcast signal for reproduction recorded in said recording/reproducing part, previously preserves a program parameter described in said next program information table as a next program parameter, and reads said next program parameter from said storage means to set said next program parameter as said signal extraction parameter when the contents of said information table change.

9. The digital broadcast receiving system according to claim 1, further comprising:

recording/reproducing means having a recording/reproducing part receiving an externally received digital broadcast signal from outside for recording said externally received digital broadcast signal while outputting recorded said signal as a digital

broadcast signal for reproduction, wherein

said digital broadcast signal includes said digital broadcast signal for reproduction,

said recording/reproducing means further comprises:

5 a discontinuity flag adding part for adding a discontinuity flag to said externally received digital broadcast signal when said recording/reproducing part stops recording said externally received digital broadcast signal and making said recording/reproducing part record said externally received digital broadcast signal to which said discontinuity flag is added as said digital broadcast signal for reproduction, and

10 said parameter set means monitors said discontinuity flag in said digital broadcast signal for reproduction, while said predetermined criterion includes presence/absence of said discontinuity flag.

10. The digital broadcast receiving system according to claim 1, further comprising:

15 recording/reproducing means having a recording/reproducing part receiving an externally received digital broadcast signal from outside for recording said externally received digital broadcast signal while outputting recorded said signal as a digital broadcast signal for reproduction, wherein

20 said digital broadcast signal includes said digital broadcast signal for reproduction,

said recording/reproducing means further comprises:

25 a discontinuity flag adding part adding a discontinuity flag to said digital broadcast signal for reproduction when said recording/reproducing part shifts from a reproducing state for said digital broadcast signal for reproduction to a stop state, and

said parameter set means monitors said discontinuity flag in said digital broadcast signal for reproduction, while said predetermined criterion includes presence/absence of said discontinuity flag.

5 11. The digital broadcast receiving system according to claim 1, further comprising:

recording/reproducing means having a recording/reproducing part receiving an externally received digital broadcast signal from outside for recording said externally received digital broadcast signal while outputting recorded said signal as a digital broadcast signal for reproduction, wherein

10 said digital broadcast signal includes said digital broadcast signal for reproduction,

said recording/reproducing means further comprises:

identification code adding means for adding an identification code identifiable in a program unit to an information table in said externally received digital broadcast signal when said recording/reproducing part records said externally received digital signal and making said recording/reproducing part record said externally received digital broadcast signal to which said identification code is added as said digital broadcast signal for reproduction, and

20 said parameter set means monitors said identification code added to said information table in said digital broadcast signal for reproduction, while said predetermined criterion includes presence/absence of change of said identification code.

12. The digital broadcast receiving system according to claim 1, further comprising:

recording/reproducing means having a recording/reproducing part receiving an externally received digital broadcast signal from outside for recording said externally received digital broadcast signal while outputting recorded said signal as a digital broadcast signal for reproduction, wherein

5 said digital broadcast signal includes said digital broadcast signal for reproduction,

 said recording/reproducing means further comprises:

10 identification code adding means adding a new identification code to an information table in said digital broadcast signal for reproduction every time said recording/reproducing part shifts from a reproducing state for said digital broadcast signal for reproduction to a stop state, and

 said parameter set means monitors said identification code added to said information table in said digital broadcast signal for reproduction, while said predetermined criterion includes presence/absence of change of said identification code.

15 13. The digital broadcast signal receiving system according to claim 1, wherein

 said information table includes:

20 a current program information table corresponding to a currently broadcasted program, and

 a next program information table corresponding to a program broadcasted next, and wherein,

 said parameter set means

25 previously performs temporary set processing extracting said next program information table from said digital broadcast signal and temporarily setting a program

parameter described in said next program information table as a next program parameter,
monitors the contents of said current program information table while said
predetermined criterion includes whether or not the contents of said current program
information table change to the contents of said next program information table, and
5 performs real set processing setting temporarily set said next program
parameter as said signal extraction parameter when the contents of said information table
change.

14. The digital broadcast signal receiving system according to claim 13,
10 wherein
said receiver includes storage means,
said temporary set processing includes processing of making said storage
means store said next program parameter, and
said real set processing includes processing of reading said next program
15 parameter from said storage means and setting said next program parameter as a signal
extraction parameter.

15. The digital broadcast signal receiving system according to claim 13,
wherein
20 said signal extraction means extracts a program signal from said digital
broadcast signal on the basis of valid said signal extraction parameter,
said temporary setting includes processing of temporarily setting said next
program parameter without validating the same as said signal extraction parameter, and
said real set processing includes processing of validating said signal extraction
25 parameter.

ABSTRACT OF THE DISCLOSURE

A second is counted at a step S11, and an information table is read at a step S12. Content change of the information table is checked at a step S13. The content change is checked by checking the value of a CRC or checking content change of at least one of values of PIDs of an image, a sound and a PCR, stream types and descriptors, information necessary for operations of a receiver. When the contents of the information table are determined as changed by the aforementioned checking method (YES at the step S13), a determination is made that change of a program is detected at a step S14 and a program parameter described in the information table is set as a signal extraction parameter of a demultiplexer at a step S15, for executing channel changing validating the signal extraction parameter set in the demultiplexer at a step S16. Thus obtained is a digital broadcast receiving system capable of executing receiving in program change with no hindrance through a receiver having a relatively simple structure.

FIG. 1

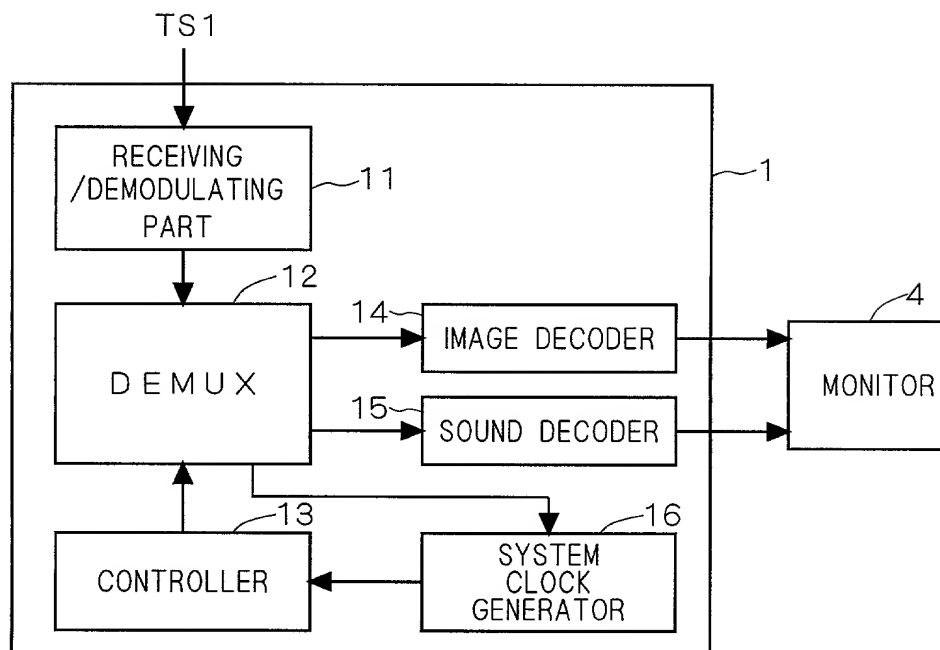


FIG. 2

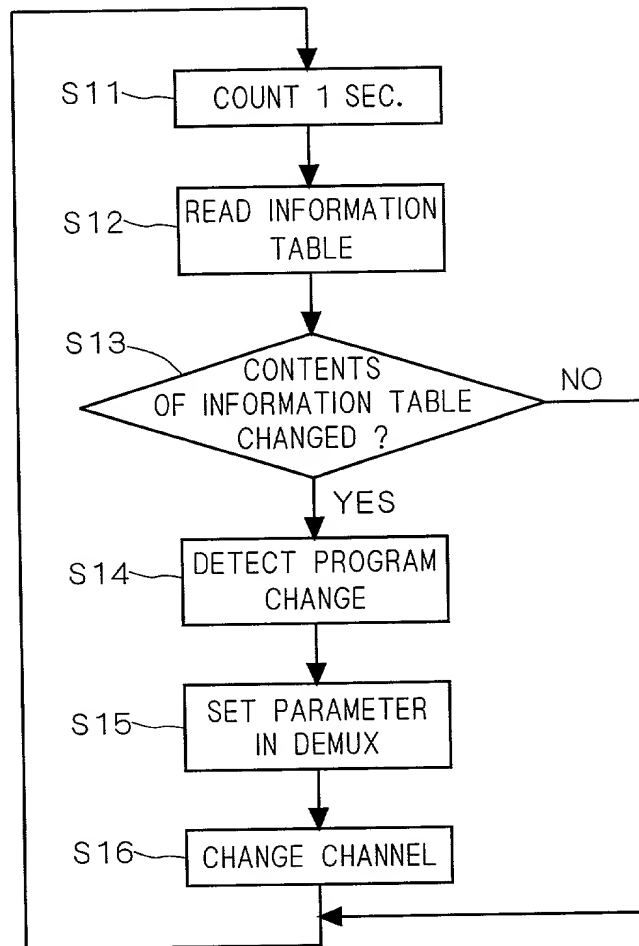


FIG. 3

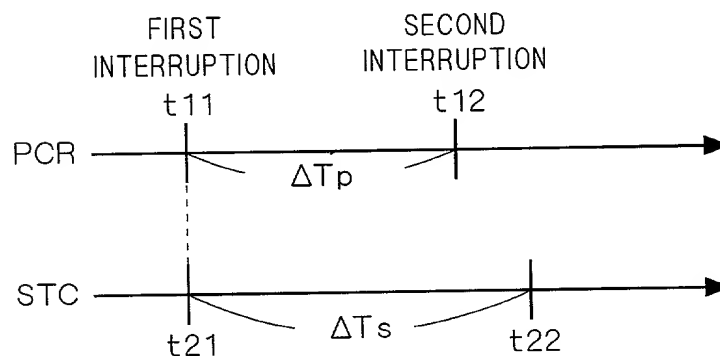


FIG. 4

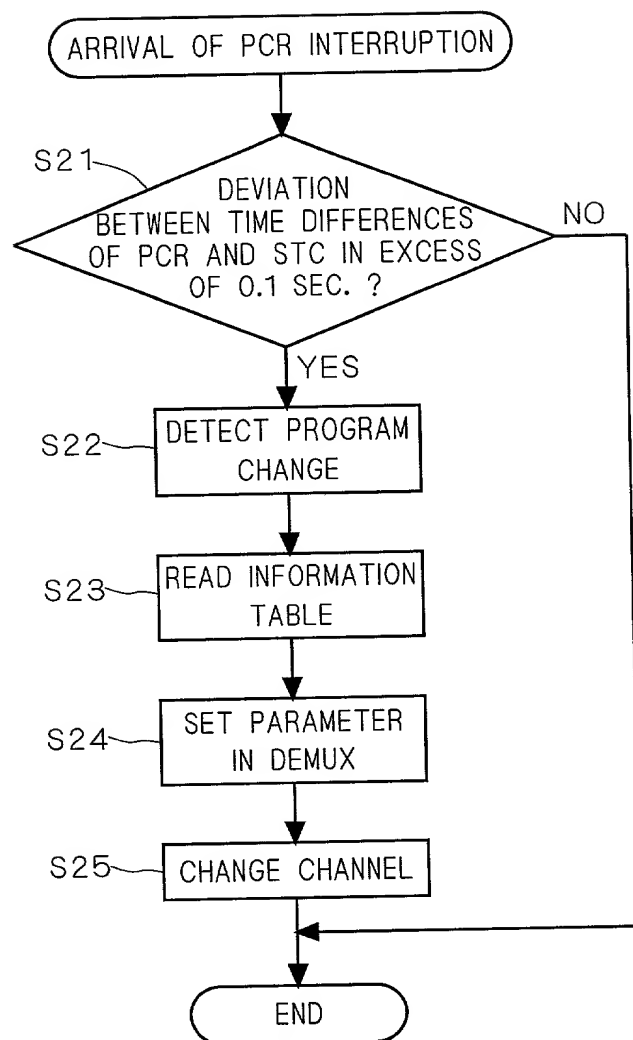


FIG. 5

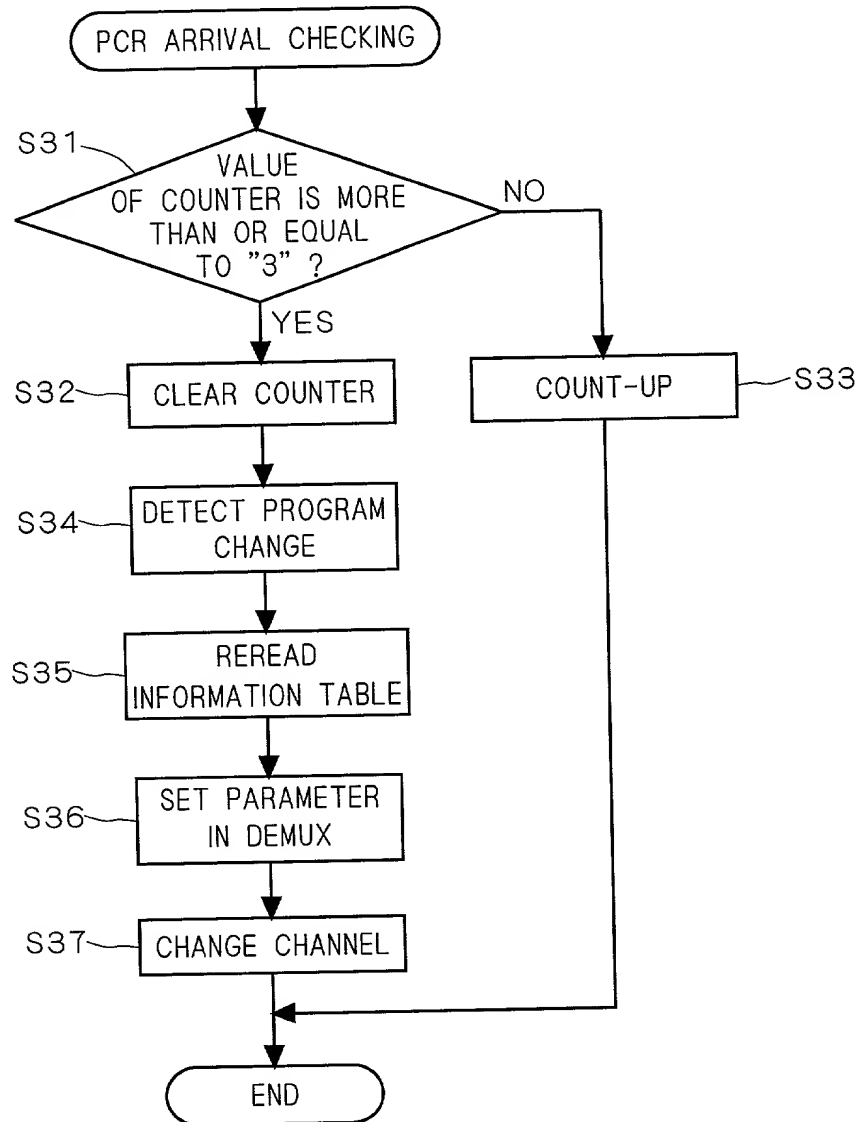


FIG. 6

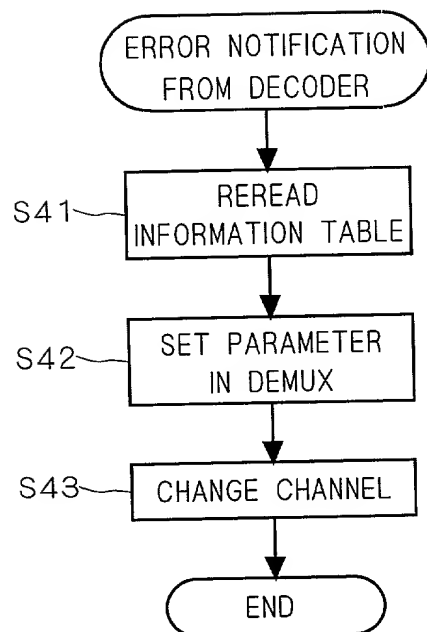


FIG. 7

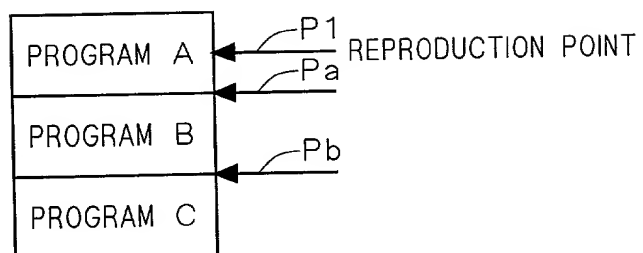


FIG. 8

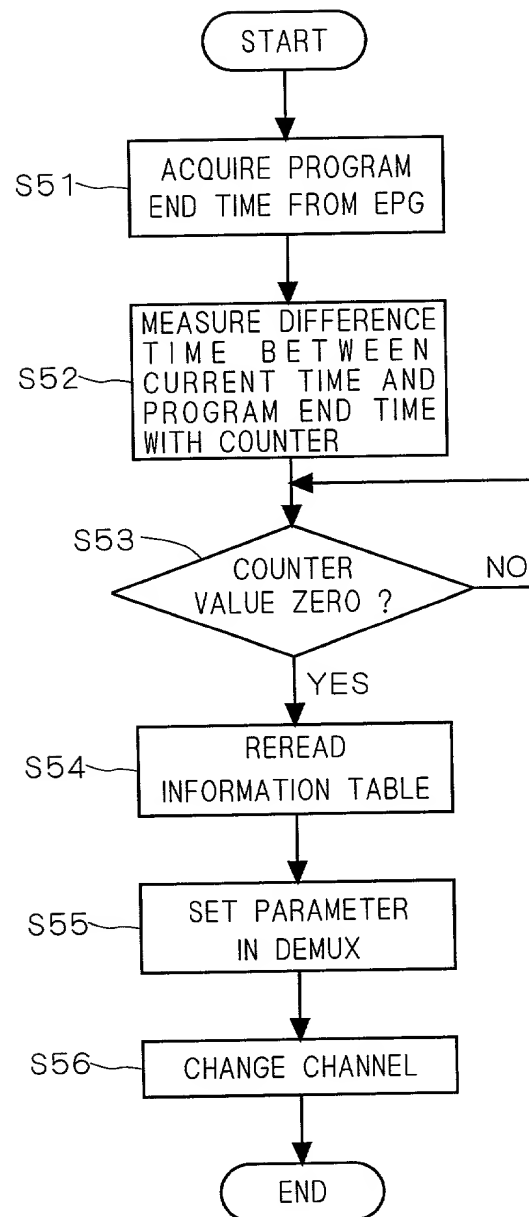


FIG. 9

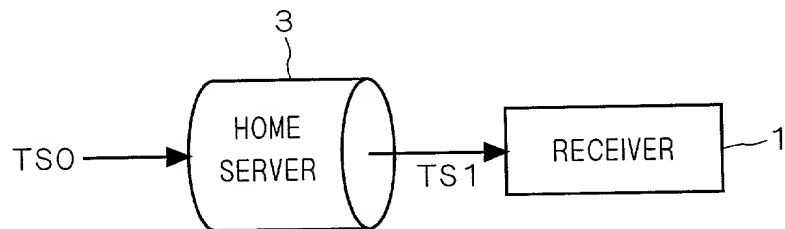


FIG. 10

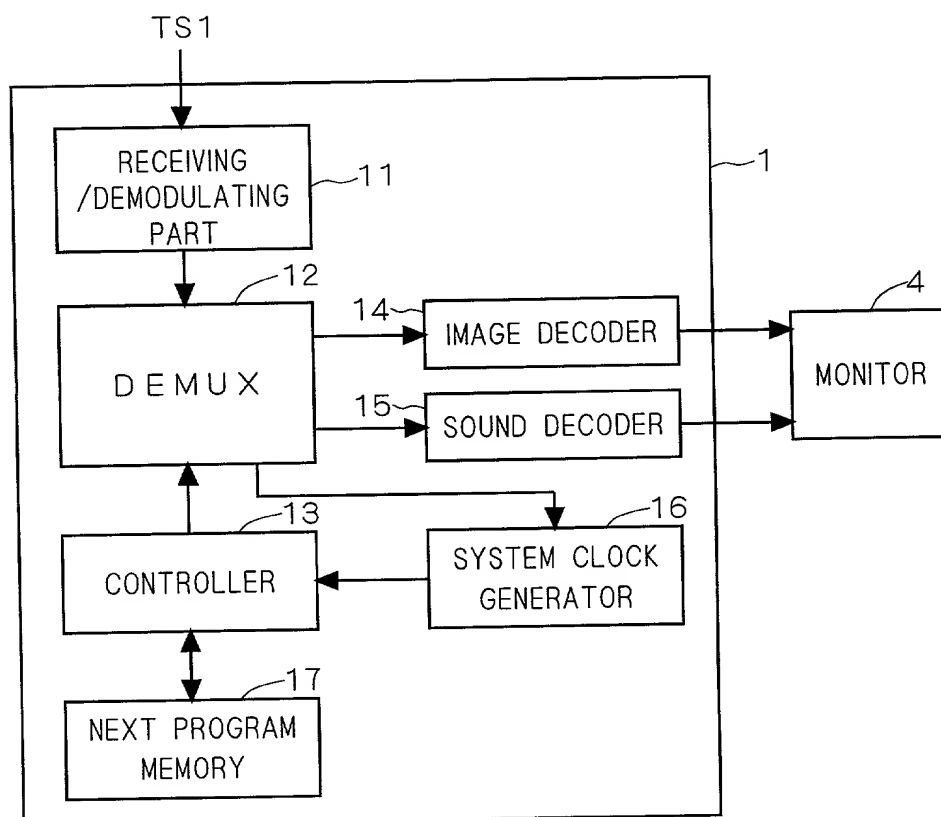


FIG. 11

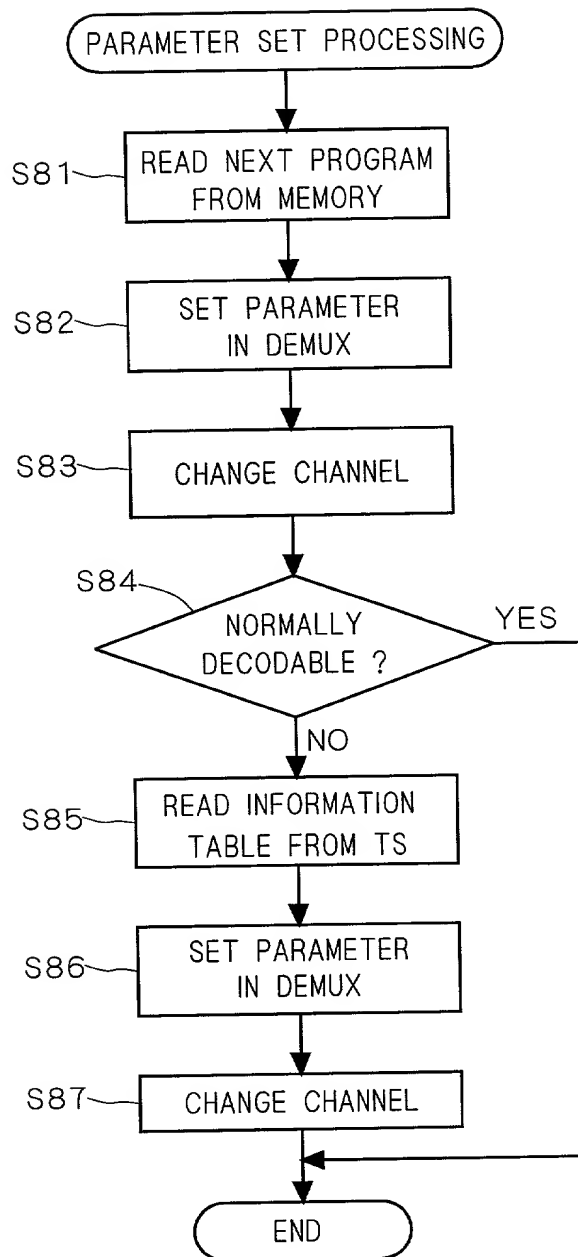


FIG. 12

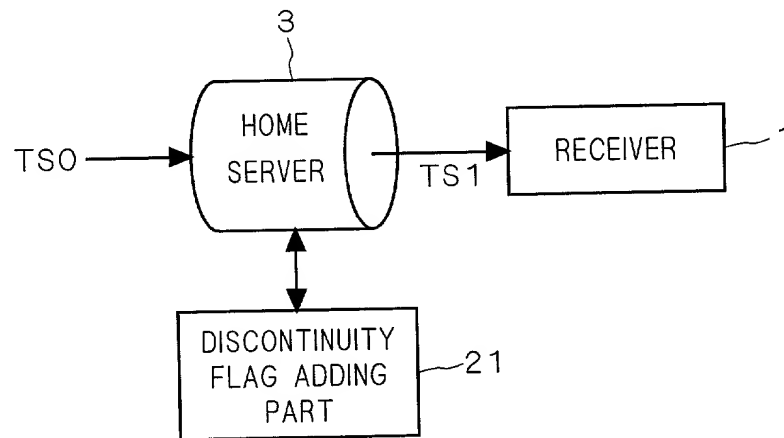


FIG. 13

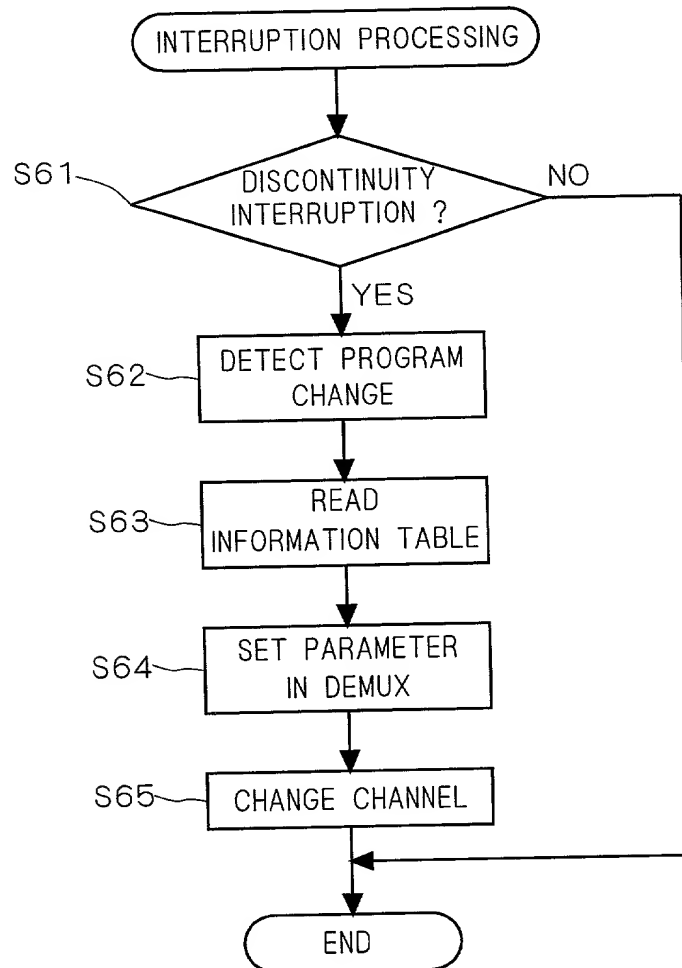


FIG. 14

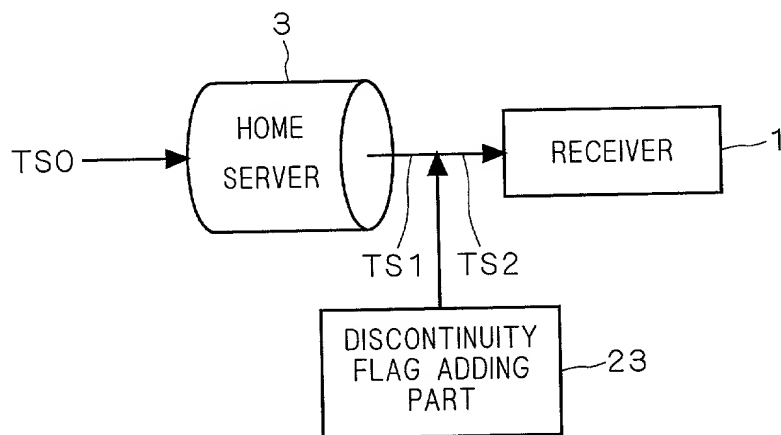


FIG. 15

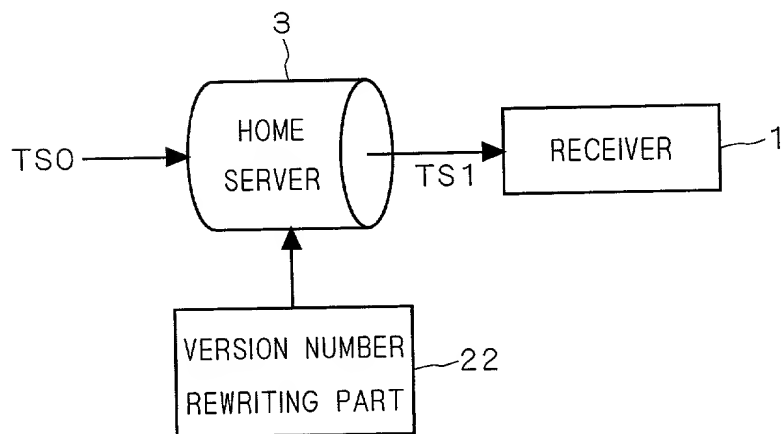


FIG. 16

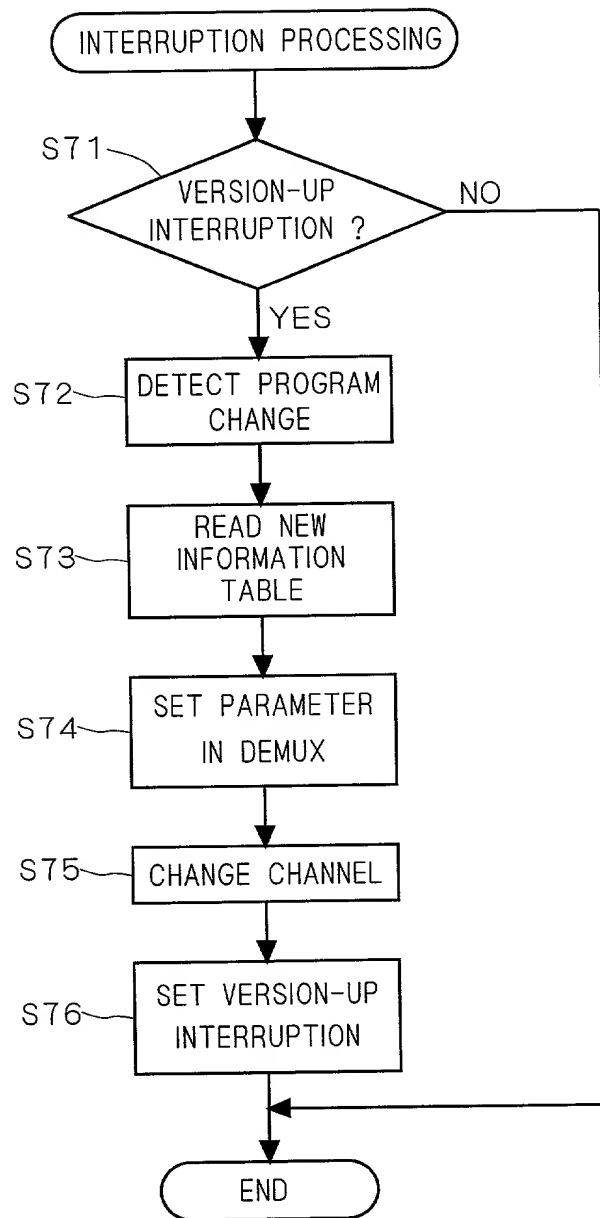


FIG. 17

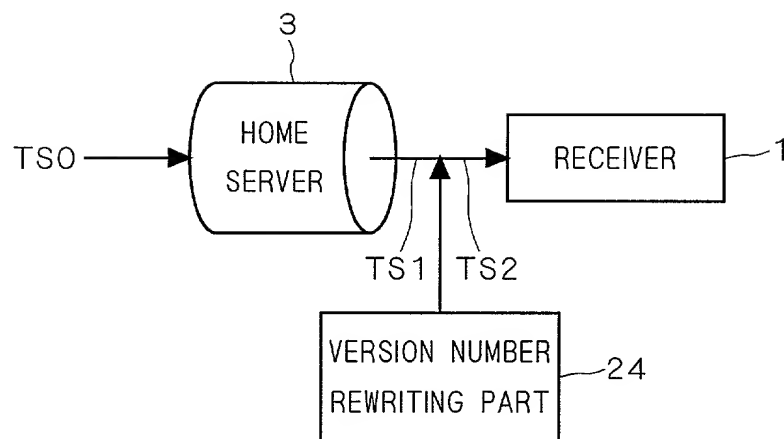


FIG. 18

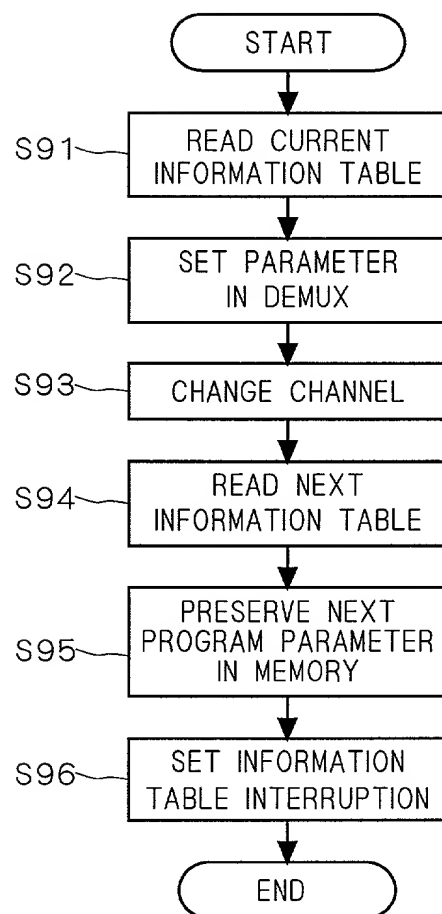


FIG. 19

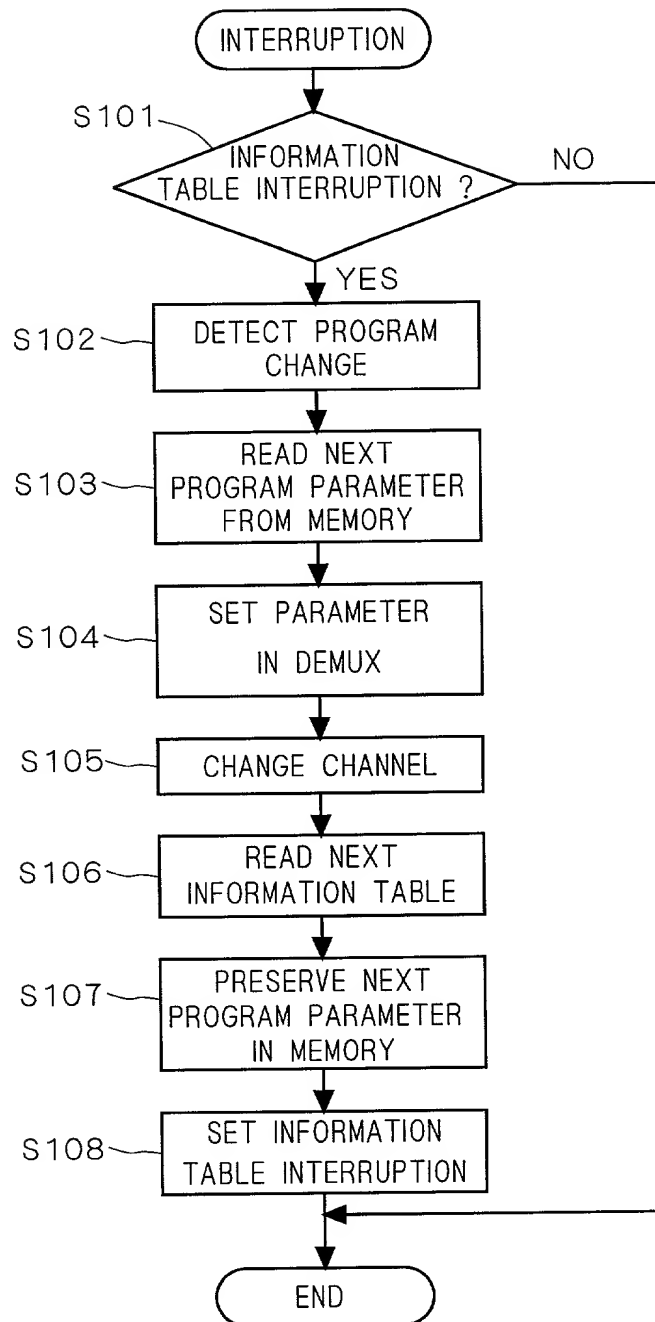


FIG. 20

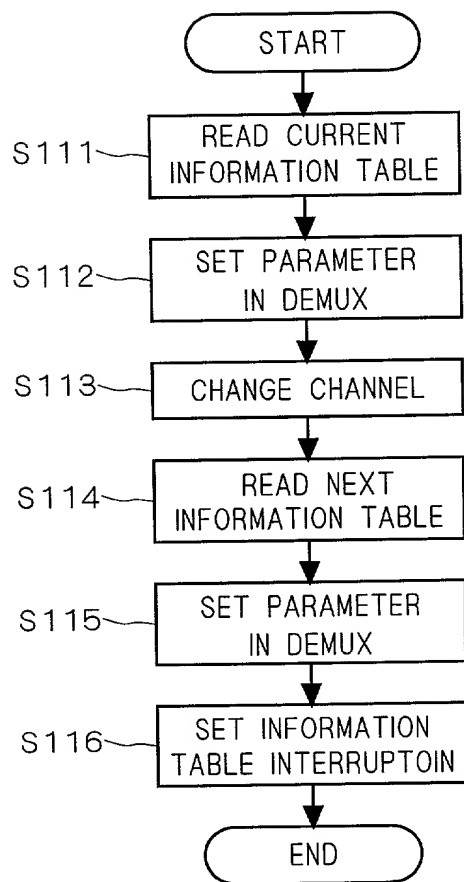


FIG. 21


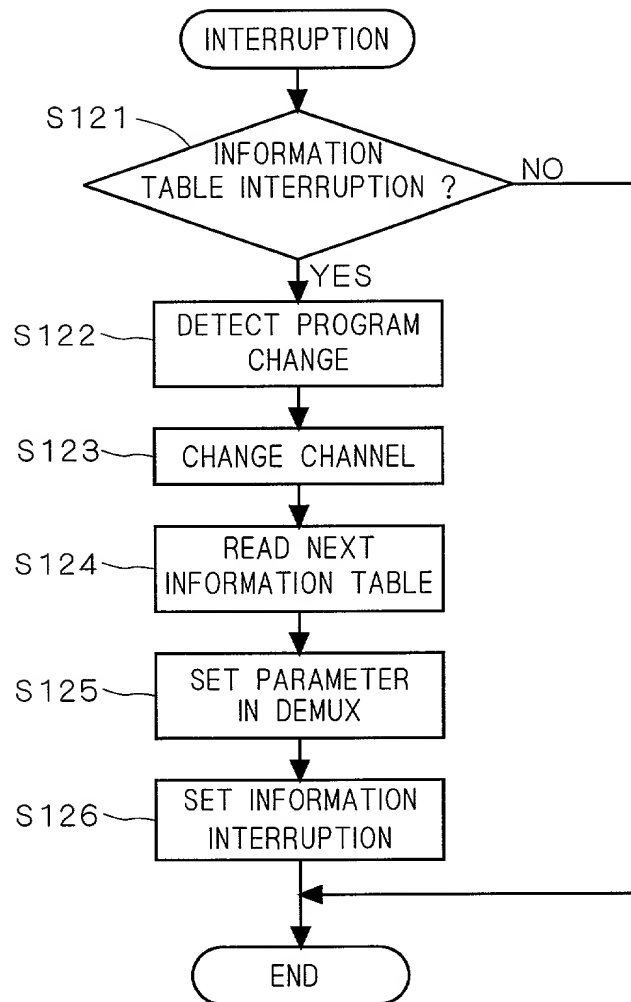


FIG. 22

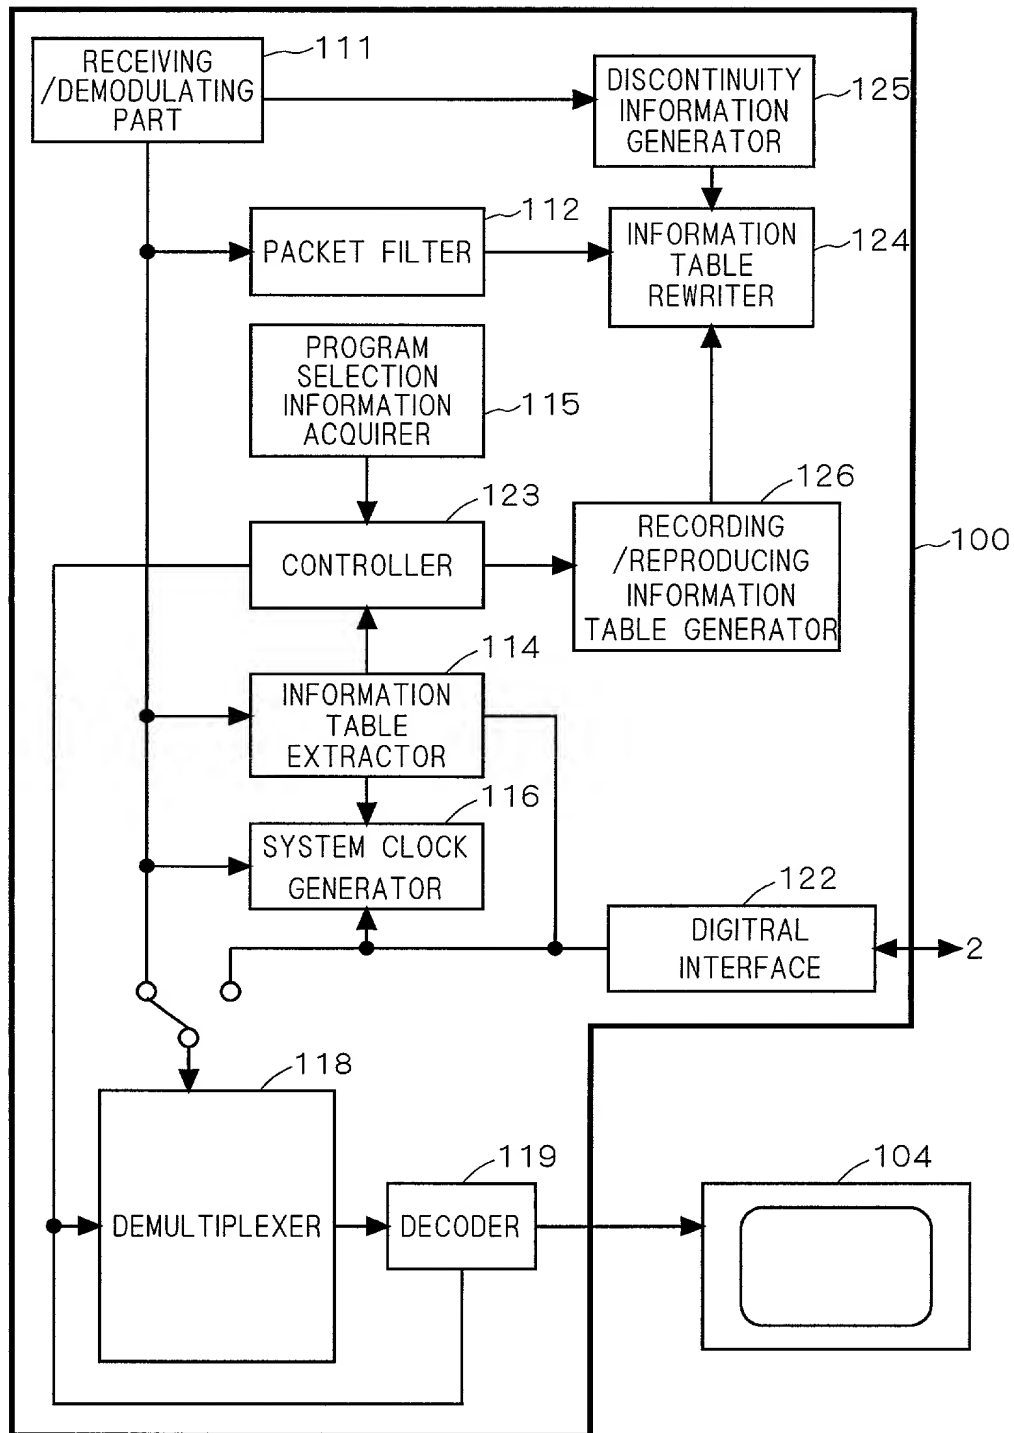

(1) Japanese Patent Application Laid-Open No. 9-247603 (1997)

“Digital Broadcast Receiving System”

The following is the extract relevant to the present invention:

In the digital broadcast receiving system according to the invention disclosed
5 in this gazette, information necessary for recording/reproducing, especially
information showing a bit rate of a program of a digital broadcast signal, the
broadcast starting time of day, the time length of the broadcast, the name of the
program and the type of each stream of the name of the channel and the digital
broadcast signal to be recorded is extracted and is multiplexed on a digital television
10 signal as a recording/reproducing information table in a predetermined table form.
Furthermore, information on a discontinuity point is multiplexed on the information
table.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者（下記の名称が複数の場合）であると信じています。

上記発明の明細書は、

- ☐ 本書に添付されています。
- ☐ ____月____日に提出され、米国出願番号または特許協定条約国際出願番号を____とし、
(該当する場合) ____に訂正されました。

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

DIGITAL BROADCAST RECEIVING SYSTEM

the specification of which

☒ is attached hereto.

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条 (a) - (d) 項又は365条 (b) 項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

P2000-148098

(Number)
(番号)

JAPAN

(Country)
(国名)(Number)
(番号)(Country)
(国名)

私は、第35編米国法典119条 (e) 項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条 (c) に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)(Filing Date)
(出願日)(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、私自信の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed

優先権主張

May 19, 2000

(Day/Month/Year Filed)
(出願年月日)☒Yes
はい☐No
いいえ☐Yes
はい☐No
いいえ(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。

(弁理士、または代理人の氏名及び登録番号を明記のこと)

RAYMOND C. STEWART (Reg. No. 21,066)
 JOSEPH A. KOLASCH (Reg. No. 22,463)
 JAMES M. SLATTERY (Reg. No. 28,380)
 DONALD C. KOLASCH (Reg. No. 23,038)
 CHARLES GORENSTEIN (Reg. No. 29,271)
 LEONARD C. SVENSSON (Reg. No. 30,330)
 MARC S. WEINER (Reg. No. 32,181)
 ANDREW F. REISH (Reg. No. 33,443)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (*list name and registration number*)

TERRELL C. BIRCH (Reg. No. 19,382)
 ANTHONY L. BIRCH (Reg. No. 26,122)
 BERNARD L. SWEENEY (Reg. No. 24,448)
 MICHAEL K. MUTTER (Reg. No. 29,680)
 GERALD M. MURPHY, JR. (Reg. No. 28,977)
 TERRY L. CLARK (Reg. No. 32,644)
 ANDREW D. MEIKLE (Reg. No. 32,868)
 JOE M. MUNCY (Reg. No. 32,334)

書類送付先

Send Correspondence to:

BIRCH, STEWART, KOLASCH AND BIRCH

P.O.Box 747

Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000

Facsimile: (703) 205-8050

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (*name and telephone number*)

(703) 205-8000

| | | |
|-------------|---|---------------------------|
| 唯一または第一発明者名 | Full name of sole or first inventor Maki YUKAWA | |
| 発明者の署名 | Inventor's signature Maki Yukawa | Date September 6, 2000 |
| 住所 | Residence TOKYO, JAPAN | |
| 国籍 | Citizenship JAPAN | |
| 私書箱 | Post Office Address c/o MITSUBISHI DENKI KABUSHIKI KAISHA, 2-3, Marunouchi 2-chome, Chiyoda-ku, TOKYO 100-8310 JAPAN | |
| 第二共同発明者 | Full name of second joint inventor, if any | |
| 第二共同発明者の署名 | Second inventor's signature | Date |
| 住所 | Residence | |
| 国籍 | Citizenship | |
| 私書箱 | Post Office Address | |

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors)